


ELECTROMAGNETIC FORCE



MAGNETIC FLUX

Magnetic Flux is the amount of magnetic field passing through a given area.



$$\phi = \int \vec{B} \cdot d\vec{A} \Rightarrow \phi = \vec{B} \cdot \vec{A} = BA \cos\theta$$

Unit \rightarrow weber (Wb)



FARADAY'S LAW OF ELECTROMAGNETIC INDUCTION

Whenever the flux of a magnetic field through the area bounded by a closed conducting loop changes, an emf is produced in the loop. The emf is given by

$$\varepsilon = - \frac{d\phi}{dt}$$



LENZ'S LAW

According to lenz's law, if the flux associated with any loop changes than the induced current flows in such a fashion that it tries to oppose the cause which has produced it.

MOTIONAL EMF

$$\mathbf{E} = \int (\vec{v} \times \vec{B}) \cdot d\vec{l}$$



EMF developed across the ends of the rod moving perpendicular to magnetic field velocity perpendicular to the rod is

$$\varepsilon = vB l$$

INDUCED EMF IN A ROTATING ROD



$$\int dE = \int_0^l B \omega x dx$$

$$V_A - V_B = \frac{B \omega l^2}{2}$$

INDUCED ELECTRIC FIELD

$$\text{EMF, } e = \oint \vec{E} \cdot d\vec{l}$$

Using Faraday's law of induction

$$\varepsilon = - \frac{d\phi}{dt}$$

$$\text{or, } \oint \vec{E} \cdot d\vec{l} = - \frac{d\phi}{dt}$$



SELF INDUCTION

1 SELF INDUCTION

If current in the coil changes by Δi in a time interval Δt , the average emf induced in the coil is given as

$$\varepsilon = -\frac{\Delta(N\phi)}{\Delta t} = -\frac{\Delta(Li)}{\Delta t} = -\frac{L\Delta i}{\Delta t}, \text{ S.I unit of inductance is wb/amp or Henry (H)}$$

SELF INDUCTANCE OF SOLENOID


$$L = \mu_0 n^2 \pi r^2 l$$

n = no. of turns/length

r = radius ; μ_0 = Permeability


l = length

$$\text{Inductance/Volume} = \mu_0 n^2$$

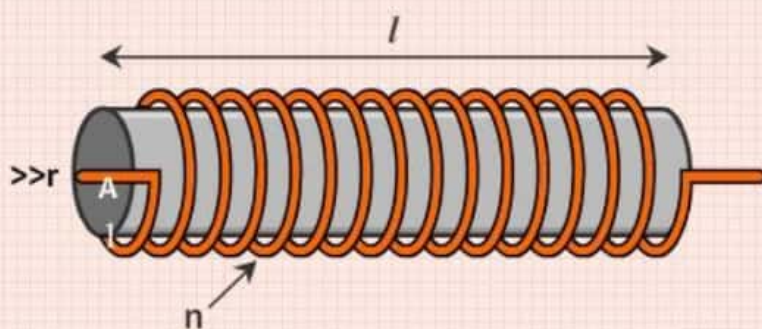

2 INDUCTOR


$$V_A - L \frac{di}{dt} = V_B, \text{ Energy stored in inductor, } U = \frac{1}{2} Li^2$$





3 L - R CIRCUIT

At $t = 0$, inductor behaves as an open switch.

At $t = \infty$, inductor behaves as plane wire.

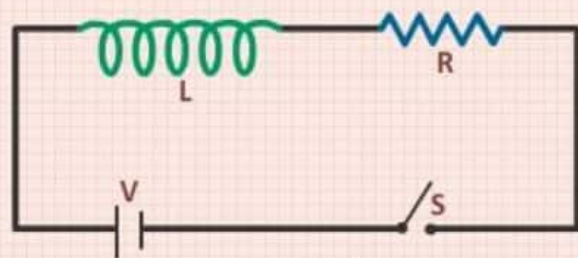



GROWTH OF CURRENT

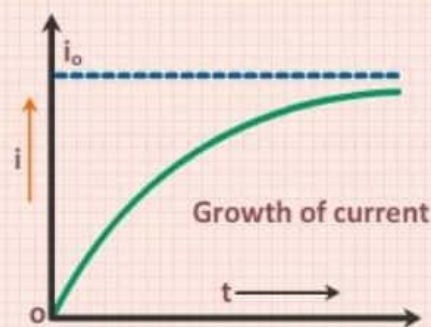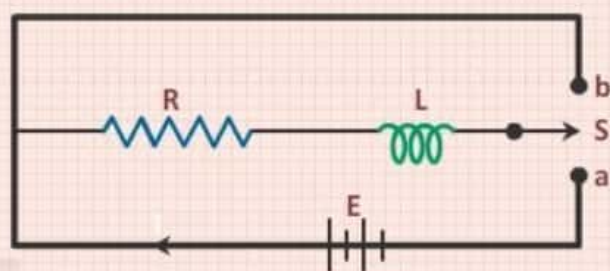

The maximum current in the circuit $i_0 = E/R$. So

$$i = i_0 \left\{ 1 - e^{-\frac{R}{L}t} \right\}$$

4 DECAY OF CURRENT

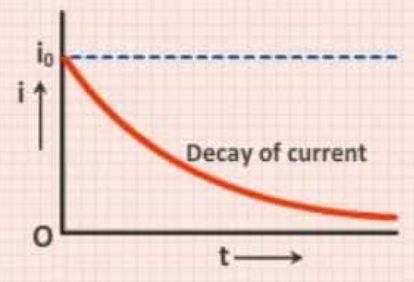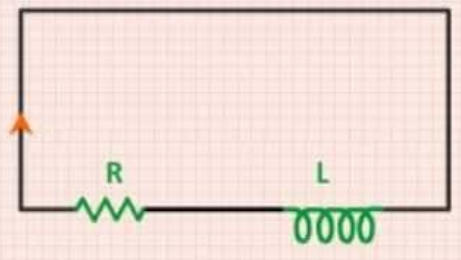


$$i = i_0 e^{-\frac{R}{L}t} = i_0 e^{-\frac{t}{\tau}}$$

5 MUTUAL INDUCTANCE


$$\mathcal{E} = -M \frac{di_1}{dt} \Rightarrow \phi_2 = Mi_1$$

M = **Mutual inductance**

Unit of Mutual inductance is **Henry (H)**

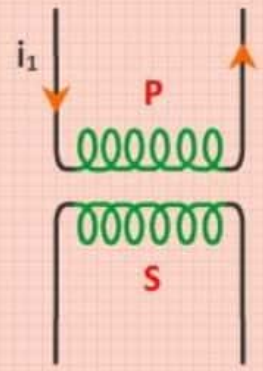

6 SERIES COMBINATION OF INDUCTORS

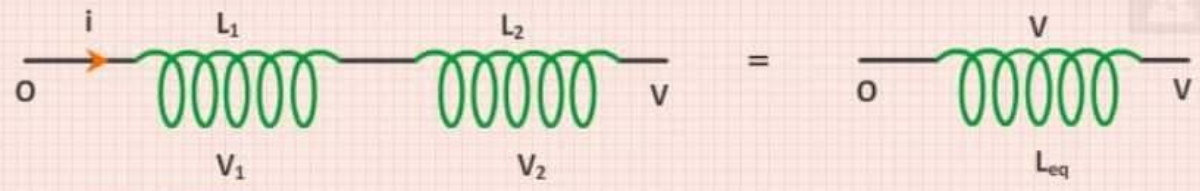

$$\therefore V = V_2 + V_1$$

$$L_{eq} \frac{di}{dt} = L_1 \frac{di}{dt} + L_2 \frac{di}{dt} \Rightarrow L_{eq} = L_1 + L_2 + \dots$$

7 PARALLEL COMBINATION OF INDUCTOR

$$i = i_1 + i_2 \Rightarrow \frac{di}{dt} = \frac{di_1}{dt} + \frac{di_2}{dt}$$

$$\frac{V}{L_{eq}} = \frac{V}{L_1} + \frac{V}{L_2}$$

$$\frac{1}{L_{eq}} = \frac{1}{L_1} + \frac{1}{L_2} + \dots$$

